


1/13


FIG. 1



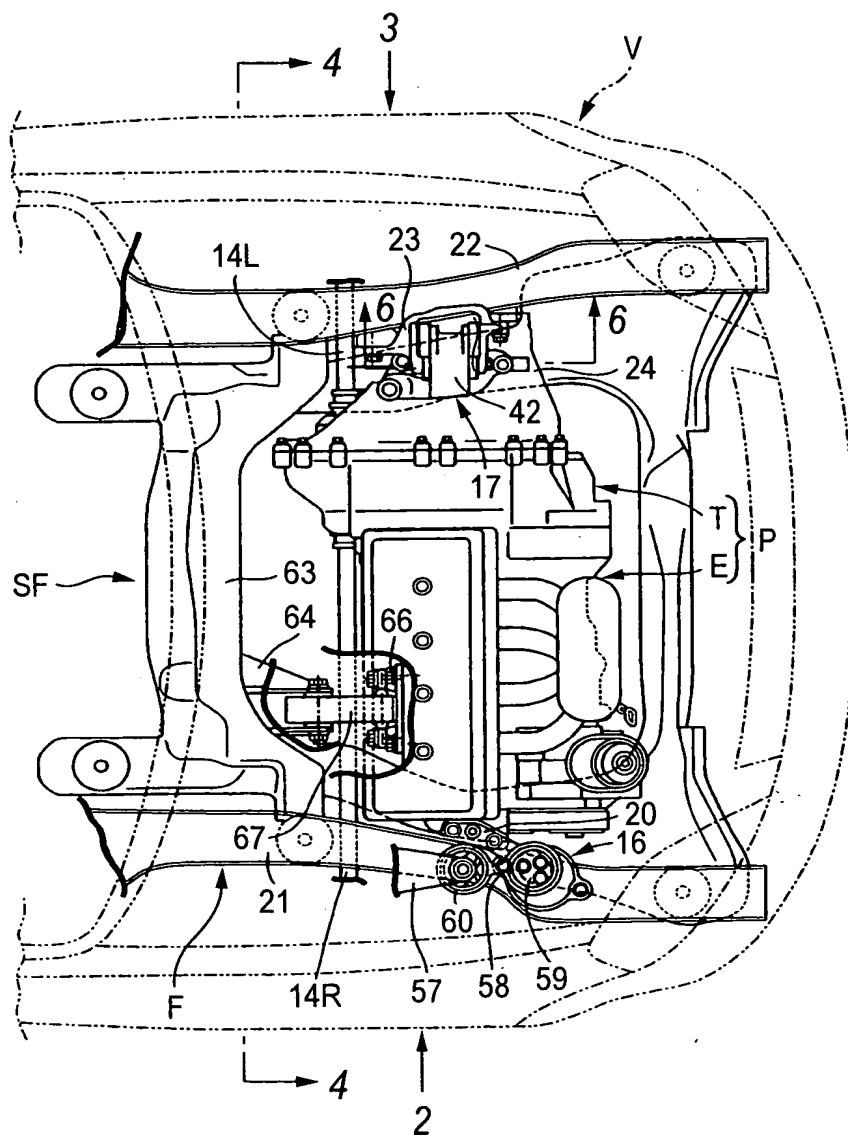

3/13


FIG. 3

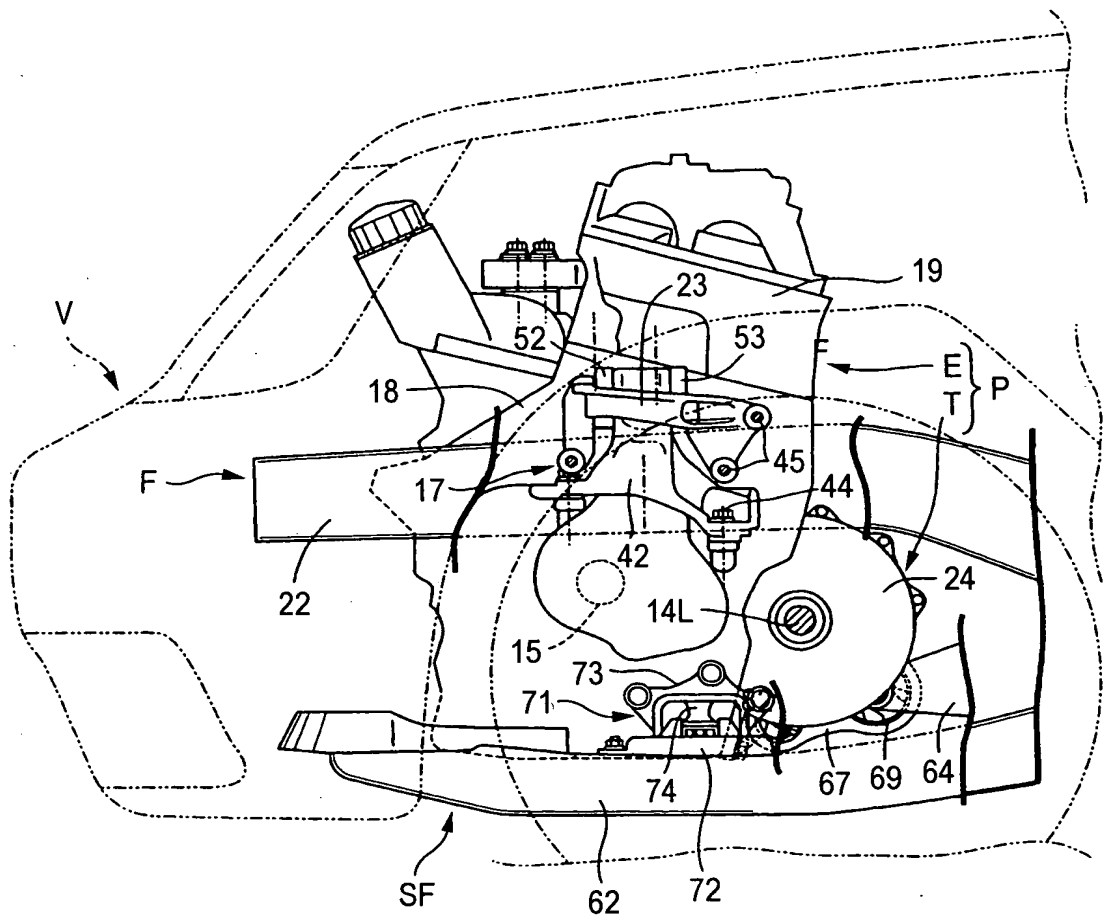



5/13


FIG. 5

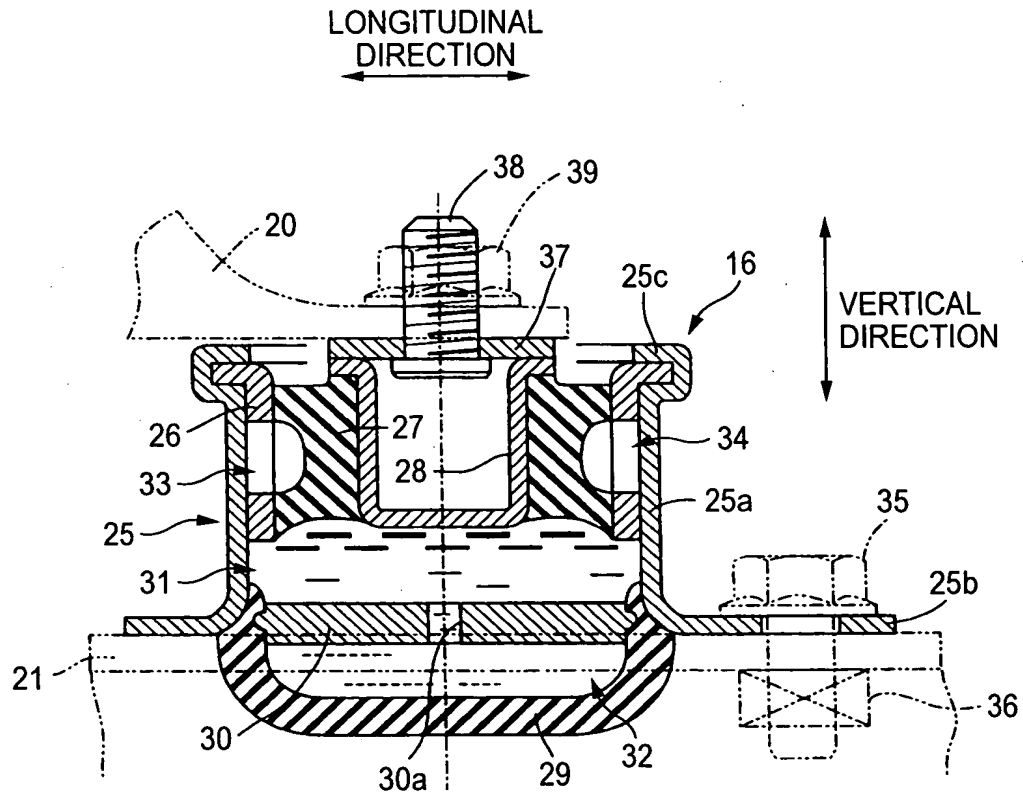




7/13

FIG. 7

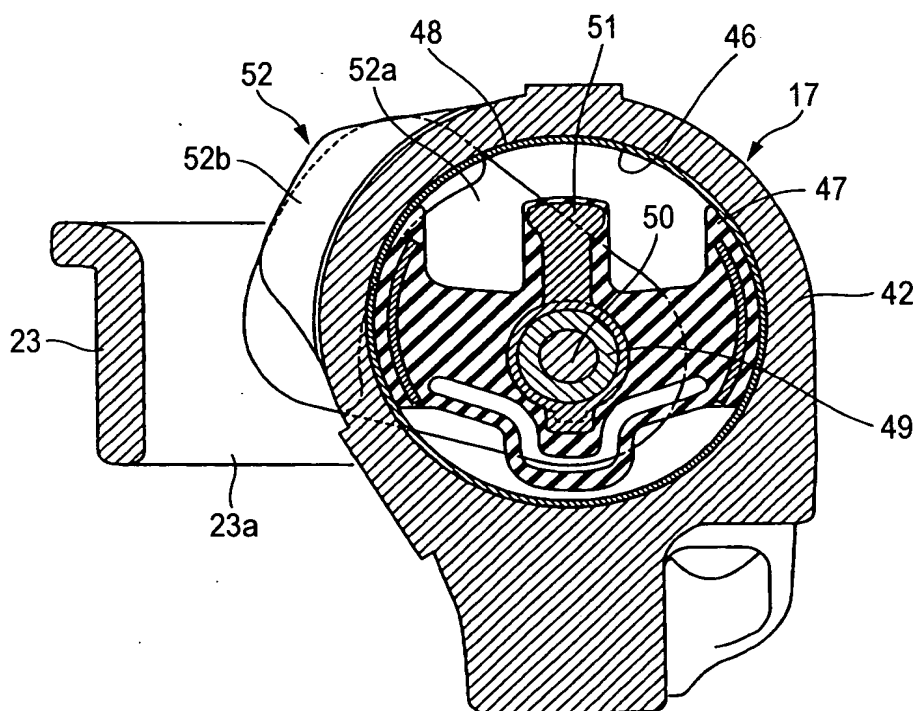

8/13


FIG. 8

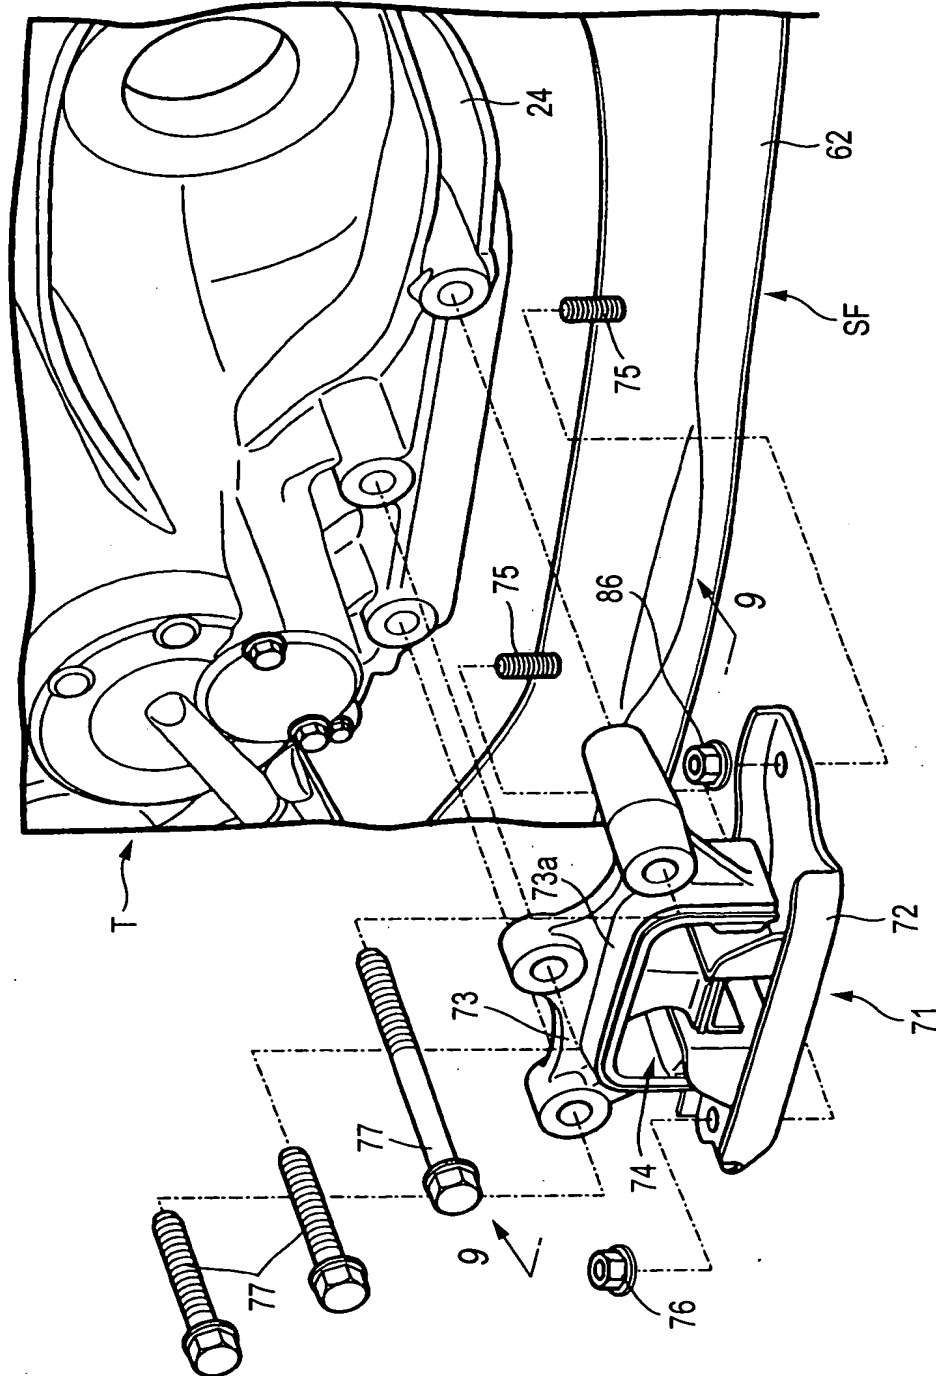




9/13


FIG. 9

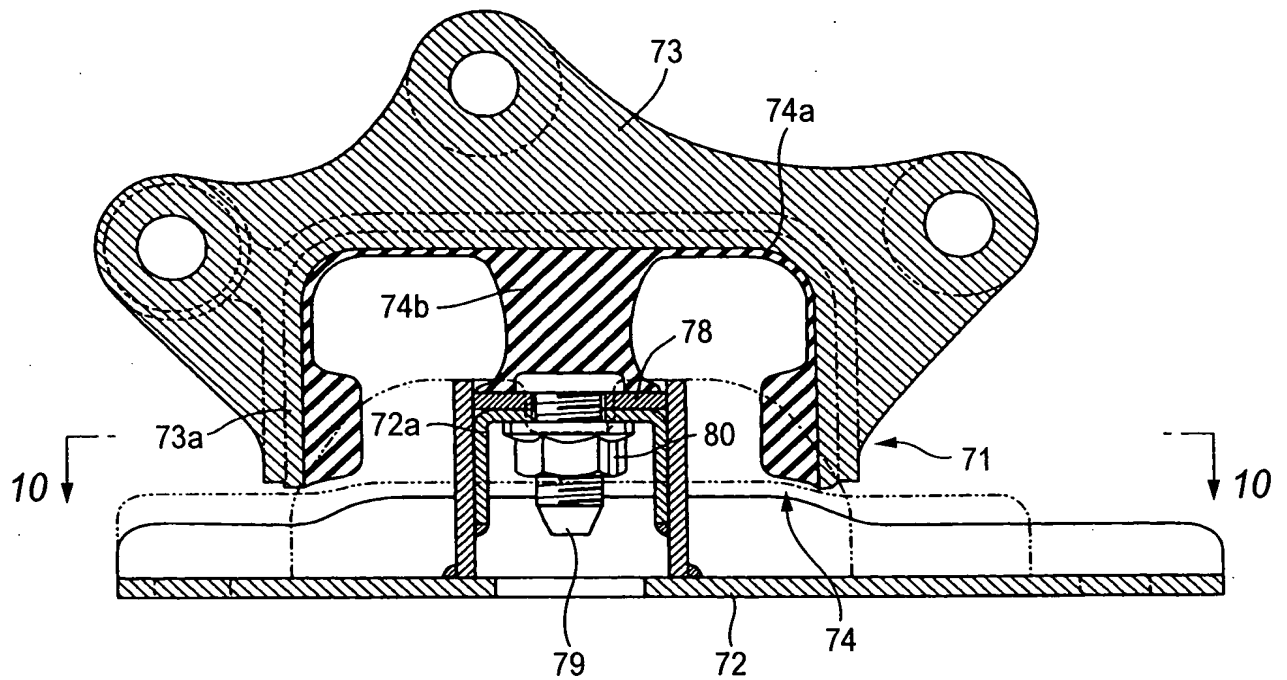

10/13

FIG. 10

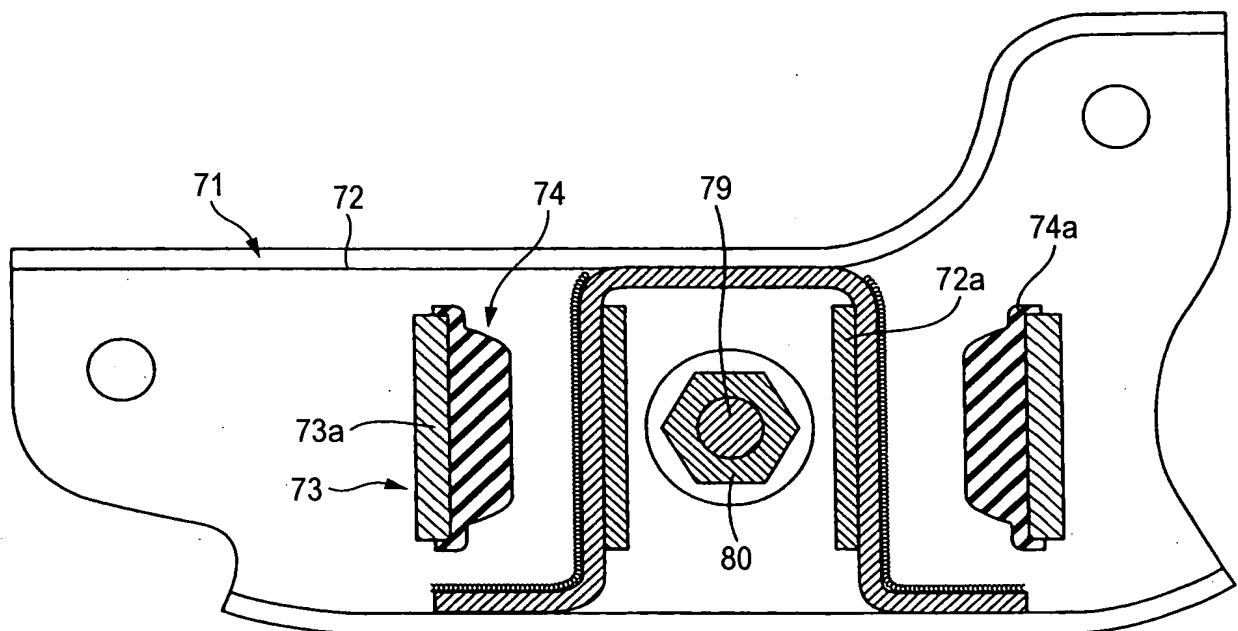

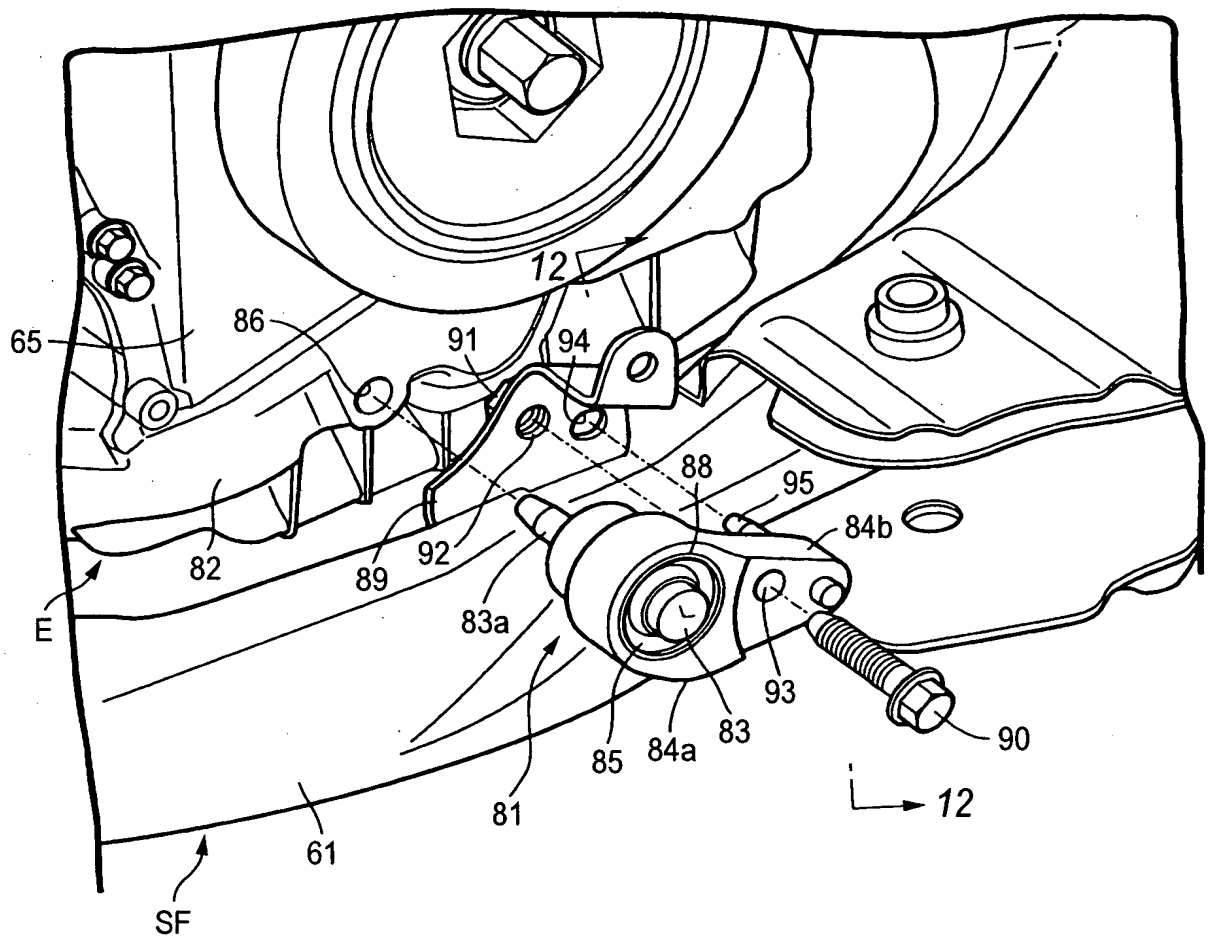

This diagram illustrates a mechanical assembly in a cross-sectional view. The assembly is mounted on a base structure 81. A central shaft 89 passes through the assembly, secured by a nut 90 and a washer 91. A spring 92 is positioned around the shaft. A piston or plunger 84 is shown in a retracted position, with a seal 85 and a guide 86. The assembly is connected to a fluid source SF via a line 61. Various other components are labeled with numbers 82, 83, 83a, 83b, 84a, 84b, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, and E.

FIG. 13

